



LIOB-10x I/O Modules extend L-INX Automation Servers, L-ROC Room Controllers, and LIOB-586/588/589 I/O Controllers with physical inputs and outputs. Several LIOB-10x models with different I/O configurations are available.

LIOB-Connect

The LIOB-10x Modules have gold-plated connectors (LIOB-Connect) to string multiple devices together and connect them to the L-INX, L-ROC or LIOB-586/588/589. The L-INX, L-ROC or LIOB-586/588/589 automatically recognize the LIOB-10x I/O Modules and provide the resulting data points.

Local Operation and Override

All L-IOB I/O Modules are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation. Device and data point information is displayed in text form and via graphical symbols.

Features

- I/O module with physical inputs and outputs
- Connected to L-INX Automation Server, L-ROC Room Controller, or LIOB-586/588/589 I/O Controller via LIOB-Connect
- Manual operation using the jog dial
- 128x64 graphic display with backlight
- Local access to information about device status and data points in clear text and symbols
- Automatic integration into device configurations with L-INX, L-ROC, and LIOB-586/588/589
- Easy device replacement without any additional software

General Specifications

Dimensions (mm)	107 x 100 x 75 (L x W x H), DIM011, DIM012, DIM013, DIM014
Installation	DIN rail mounting following DIN 43880, top hat rail EN 50022
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)
Power supply	24 VDC / 24 VAC ± 10 % via L-INX, L-ROC, L-POW or LIOB-A2/A4 via LIOB-Connect
Interfaces	1 x LIOB-Connect


Specifications LIOB-Connect

Installation	Attachable (max. 4 modules) or connected with a 4-wire cable, max. 50 m			
Type	LIOB-100	LIOB-101	LIOB-102	LIOB-103
Power consumption	1.7 W 2.6 W (Relays on)	1.7 W	1.7 W 2.7 W (Relays on)	1.7 W 2.5 W (Relays on)
Universal Input (UI)	8	8	6	6
Digital Input (DI)	2	16	-	-
Analog Output (AO)	2	-	6	6
Digital Output (DO)	9 (5 x Relay 6 A, 4 x Triac 0.5 A)	-	8 (8 x Relay 6 A)	5 (5 x Relay 6 A)
Digital Output specification	Please refer to the " General Input and Output Specification of LOYTEC devices " at the end of the L-IOB section for more details.			


Order number	Product description
LIOB-100	LIOB-Connect I/O Module: 8 UI, 2 DI, 2 AO, 9 DO (5 x Relay 6 A, 4 x Triac 0.5 A)
LIOB-101	LIOB-Connect I/O Module: 8 UI, 16 DI
LIOB-102	LIOB-Connect I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)
LIOB-103	LIOB-Connect I/O Module: 6 UI, 6 AO, 5 DO (5 x Relay 16 A)
LIOB-A2	L-IOB Adapter 2 to split the LIOB-Connect bus using 4-wire cables
LIOB-A4	L-IOB Adapter 4 to split the LIOB-Connect bus using RJ45 network cables
LIOB-A5	L-IOB Adapter 5 to terminate the LIOB-Connect bus
LPOW-2415A	LIOB-Connect power supply unit, 24 VDC, 15 W
L-TEMP2	External temperature sensor (NTC10K) for use with L-IOB Universal Inputs

Dimensions of the devices in mm and [inch]

DIM011 LIOB-100

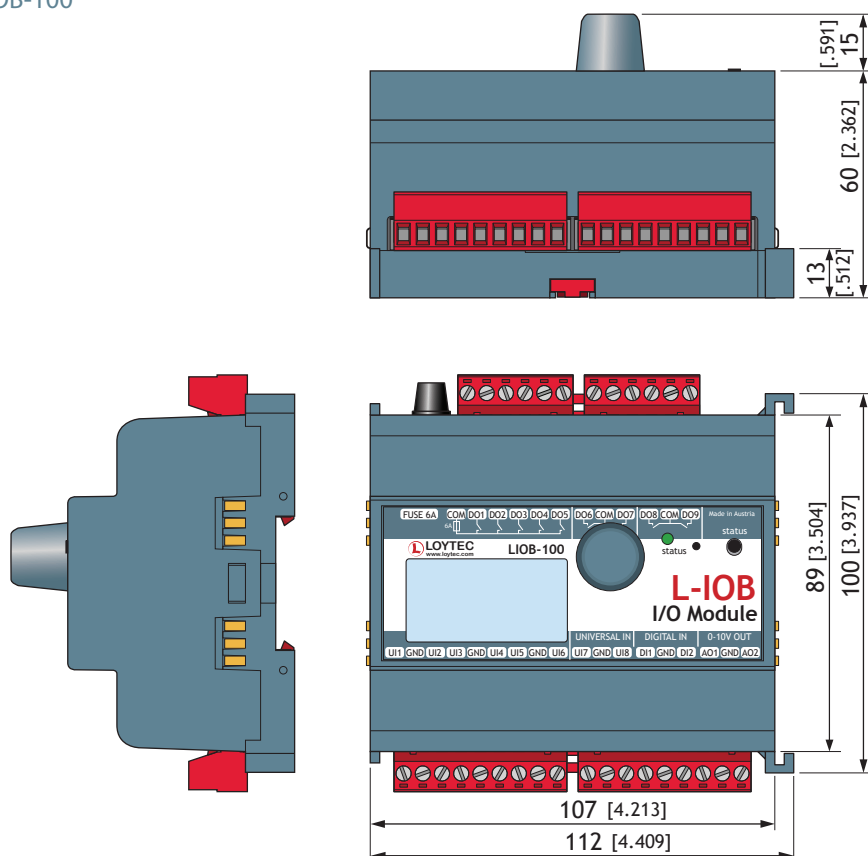

DIM012 LIOB-101

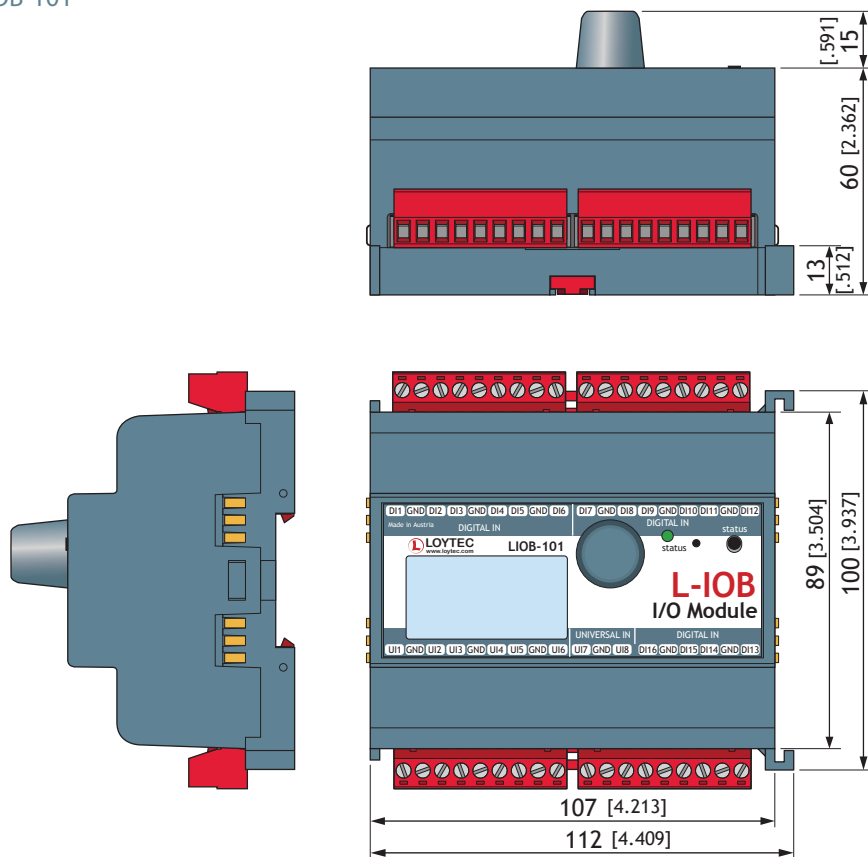

Para adquirir este producto favor de contactarnos al correo de:

ventas@atautomation.com.mx

+52 (55) 4334 - 9242
+52 (55) 6584 - 9782

SCALE 1:2
10 0 20 40 60 80 100 mm